PCT/FR01/02088

070333

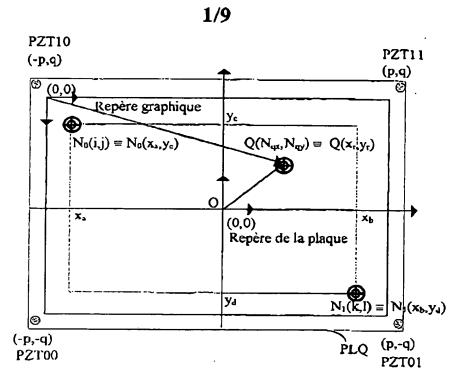


FIG - 1

Configuration de la virrine Dimersions Paramètres physiques	×
Distance contre-capteurs CH = min	CV = 500 mem
Zone autorisée Con hauf gauche X = 0 poets Y = 37 poets Talle L = 1280 pixels H = 907 pixels Acquérir	IY Ecran is
OK.	Arrage - Appliquer

FIG-2A

व्राह् WO 02/01490

PCT/FR01/02088

2/9




FIG-2B



FIG – 2C




FIG-2E




FIG-2D




FIG - 2F

10/070333

WO 02/01490

3/9

PCT/FR01/02088

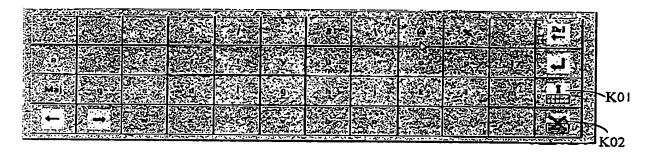


FIG-3 A

FIG - 3 B

K03


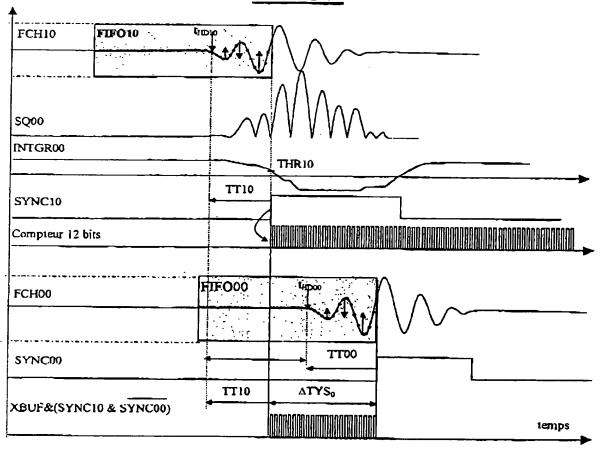


FIG-4

10/07033


WO 02/01490

PCT/FR01/02088

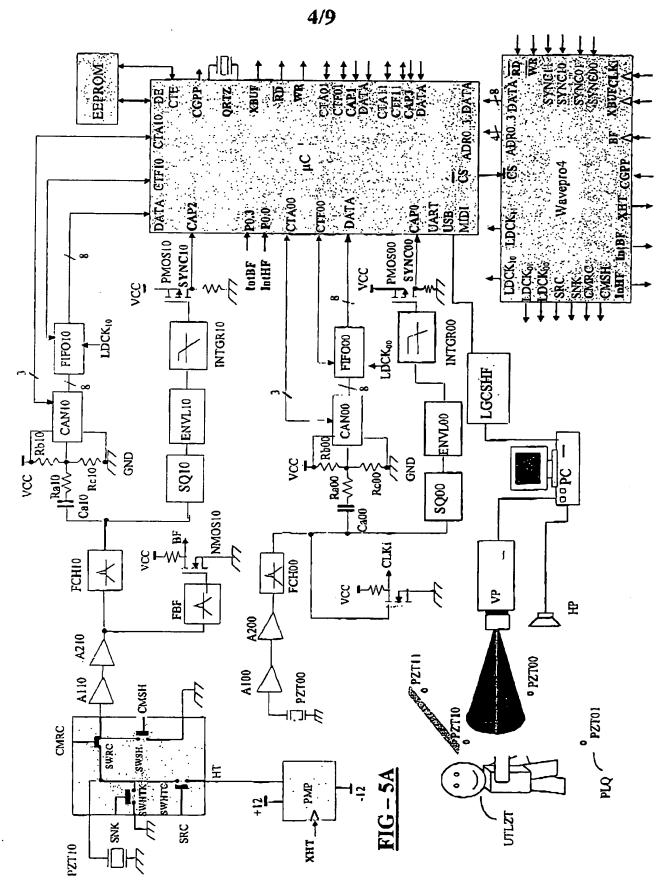


PCT/FR01/02088

5/9

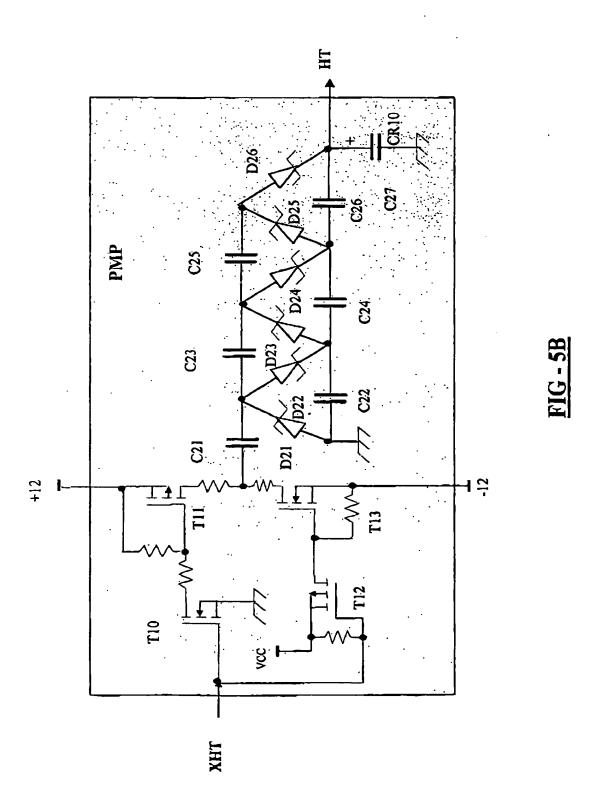

10/070333 PCT/FR01/02088

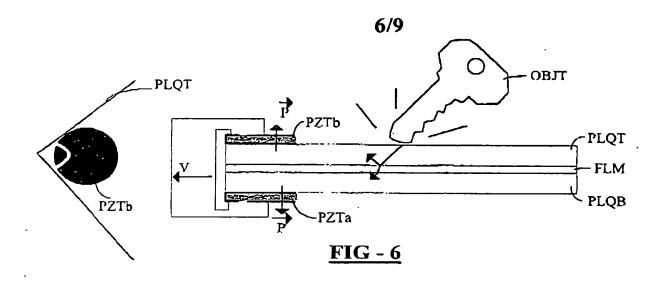




FIG – 7A




FIG - 7B


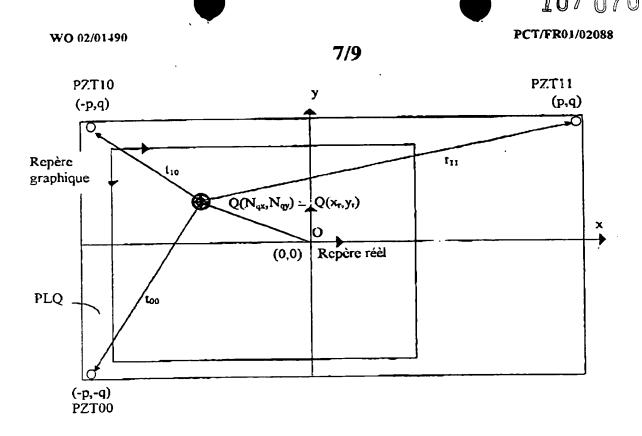


FIG - 7C



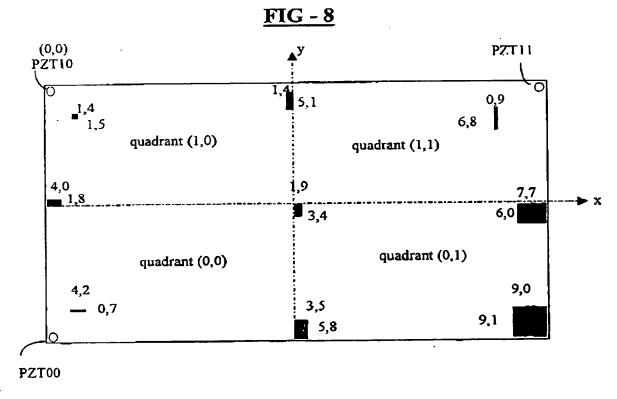


FIG - 9

PCT/FR01/02088



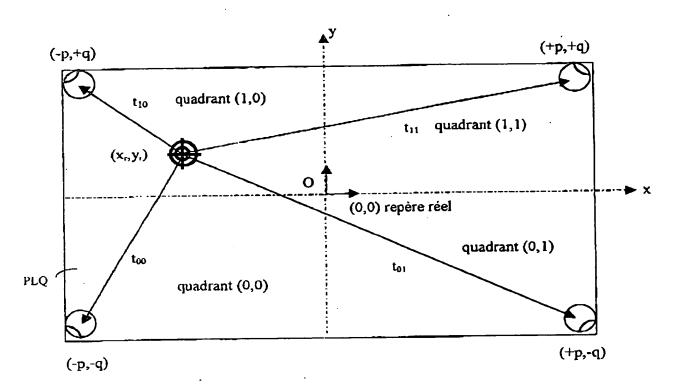


FIG - 10

•

PCT/FR01/02088

WO 02/01490

